


TOP VIEW - SINGLE PIPE

* Slope:

4:1 Miter To @ Of Pipe For Pipes 24" & Smaller

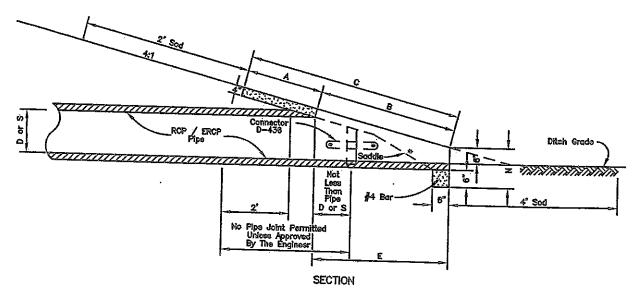

GENERAL NOTES

- 1. THE DISTRICT WILL CONSTRUCT THE DRIVEWAY DRAINAGE PIPE WITH THE MITERED ENDS. 2. THE OWNER OR OWNER'S CONTRACTOR SHALL DO ALL FINE GRADING, CONSTRUCTION OF THE CONCRETE SLAB AND ALL SODDING IN ACCORDANCE WITH THIS DETAIL. 3. THE CROSS DRAIN MITERED END SECTIONS SHALL BE CONSTRUCTED IN ACCORDANCE WITH
- FDOT INDEX 272, SHEETS 1 THRU 6.
- 4.ALL SLABS SHALL BE 5 ½ INCHES UNLESS OTHERWISE NOTED. 5.ALL SLABS SHALL BE REINFORCED IN ACCORDANCE WITH FDOT INDEX 272 AND HAVE 6X6 10/10 MESH AS A MINIMUM REINFORCEMENT OR WITH FIBER IN THE CONCRETE.
- 6.ALL DEVIATIONS FROM THE DETAIL MUST BE APPROVED BY THE DISTRICT'S ENGINEER PRIOR TO ANY CONSTRUCTION.
- 7.ALL SUBMITTALS, MUST INCLUDE 2 COPIES OF A SCALED OR FULLY DIMENSIONED, LEGIBLE, CERTIFIED SURVEY (MINIMUM SIZE 8 1/4 "BY 14" AND MAXIMUM SIZE OF 11" BY 17") DEPICTING THE PROPERTY TO BE SERVED AND REFLECTING THE PROPOSED USE AND ELEVATION VIEWS, AND RELATIONSHIP TO THE WORKS OF THE DISTRICT TIED TO A KNOWN REFERENCE POINT IN THE IMMEDIATE AREA OF THE PROPOSED USE.

WOHLFARTH CONSULTING GROUP LLC

ENGINEERS & PLANNERS

STANDARD DETAIL

MITERED END SECTION

FOR R.C.P. OR E.R.C.P. CROSS DRAIN TYPE B

	SCALE	DATE	SHEET
	N.T.S.	2/17/2018	
Ì	PROJECT	REVISION	
ı	_ _	2-17-18	
		i	